

VICINITY MAP

SHEET INDEX

	COVER
C1	GENERAL NOTES
C2	TEMPORARY EROSION AND CONTROL PLAN
C3	TESC DETAILS AND NOTES
C4	GRADING PLAN

CONSULTANTS

BUSH, ROED, & HITCHINGS, INC
2009 MINOR AVE EAST
SEATTLE, WA 98102
PHONE (206) 323-4144

RCP SHELTERS, INC
2100 SE RAYS WAY
STUART, FL 34994
PHONE (800) 525-0207

OWNER



CITY OF LYNNWOOD
19100 44TH AVENUE W
P.O. BOX 5008
LYNNWOOD, WA 98046
PHONE (425) 670-5000
WWW.CI.LYNNWOOD.WA.US
CONTACT: ERIC PETERSON
EPETERSON@LYNNWOODWA.GOV

MAYOR

NICOLA SMITH

CITY COUNCIL

SHANNON SESSIONS
SHIRLEY SUTTON
GEORGE HURST
M. CHRISTOPHER BOYER
RUTH ROSS
BENJAMIN GOODWIN
IAN COTTON


AUGUST, 2016

MEADOWDALE PARK PHASE 3



SHELTER FOUNDATION SLAB

5700 168TH STREET SOUTHWEST
LYNNWOOD, WA 98037

22" x 34" 9/9/2016 U:\C30\2016020\ENGINEERING\O-PLAN SHEETS\FOUNDATION SLAB C2 TESC PLAN.DWG

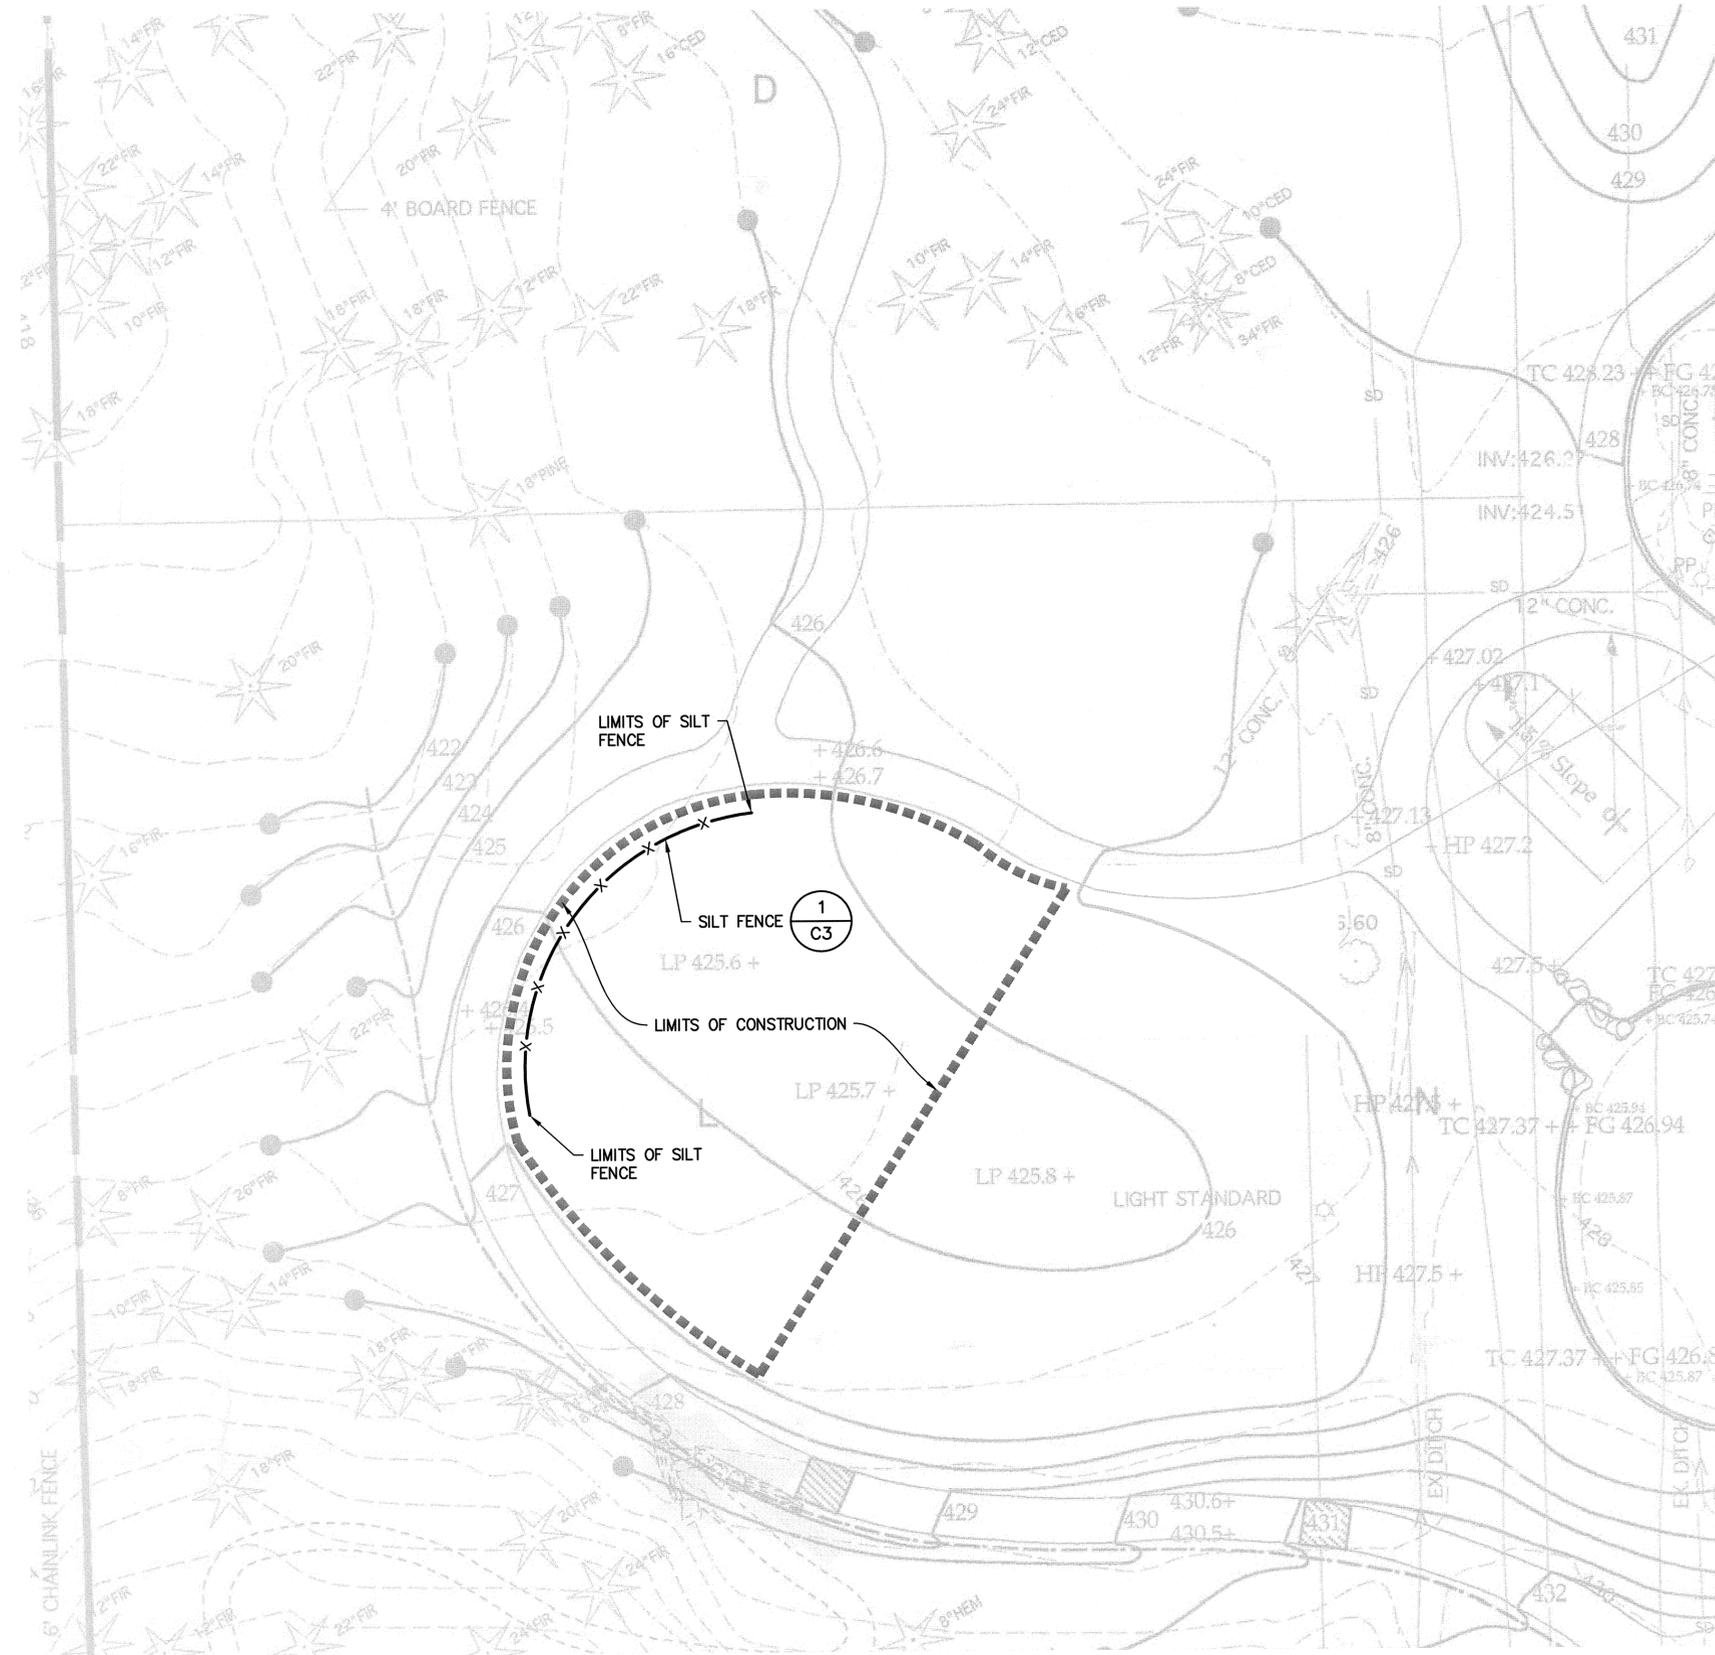

MONITOR SEDIMENT/DIRT TRACKING. ALL SEDIMENT AND DIRT SHALL BE CONTAINED ON SITE. IF SEDIMENT AND/OR DIRT IS TRACKED ON TO EXISTING ASPHALT, CONTRACTOR SHALL EMPLOY ALL MEASURES NECESSARY TO CLEAN THE ASPHALT IMMEDIATELY.

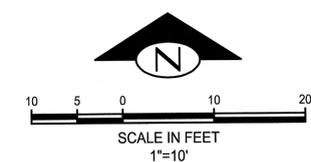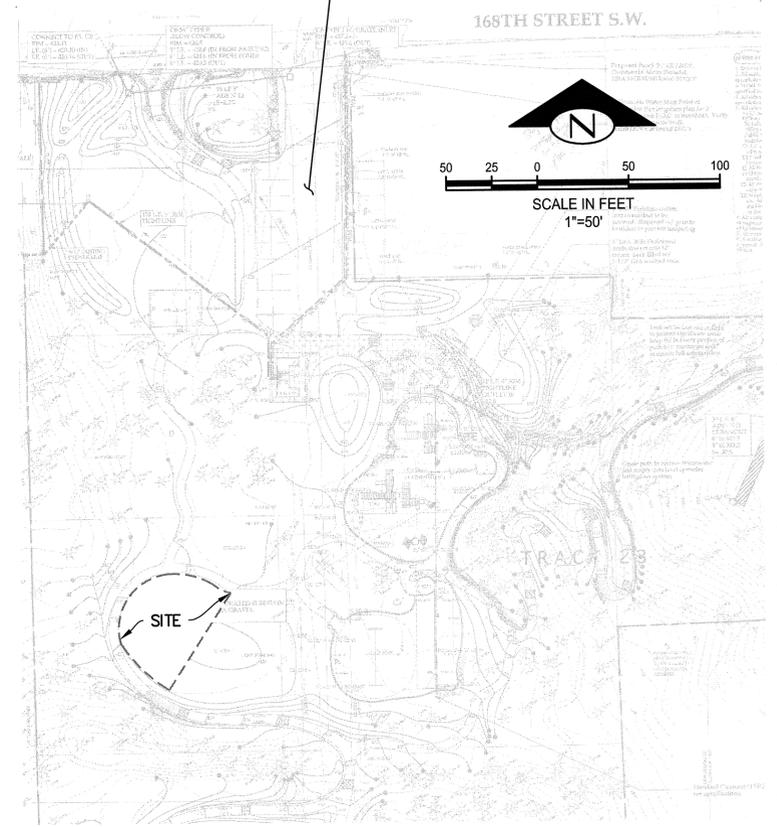

LEGEND
 SILT FENCE —X—X—
 LIMITS OF CLEARING - - - - -


 Call 2 Working Days Before You Dig
1-800-424-5555
 Utilities Underground Location Center
 (ID, MT, ND, OR, WA)



NO.	REVISION	DATE


 **BUSH, ROED & HITCHINGS, INC.**
 LAND SURVEYORS & CIVIL ENGINEERS
 2009 MINOR AVE. EAST SEATTLE, Washington 98102-3513
 (206) 323-4144 1-800-935-0508
 (206) 323-7135 FAX#

TEMPORARY EROSION AND SEDIMENT CONTROL PLAN
MEADOWDALE NEIGHBORHOOD PARK - FOUNDATION SLAB
 CITY OF LYNNWOOD
 LYNNWOOD SNOHOMISH WASHINGTON

drawn by	checked by
HRB	TFD
scale	date
AS SHOWN	9/9/16
job no.	2016020
sheet	C2 of 4

TESC NOTES:

1. REFER TO GENERAL PLAN NOTES FOR ADDITIONAL REQUIREMENTS.
2. APPROVAL OF THIS EROSION/SEDIMENTATION CONTROL (ESC) PLAN DOES NOT CONSTITUTE AN APPROVAL OF PERMANENT ROAD OR DRAINAGE DESIGN (E.G. SIZE AND LOCATION OF ROADS, PIPES, RESTRICTORS, CHANNELS, RETENTION FACILITIES, UTILITIES, ETC.).
3. THE IMPLEMENTATION OF THESE ESC PLANS AND THE CONSTRUCTION, MAINTENANCE, REPLACEMENT, AND UPGRADING OF THESE ESC FACILITIES IS THE RESPONSIBILITY OF THE APPLICANT/CONTRACTOR UNTIL ALL CONSTRUCTION IS APPROVED, AND THE POTENTIAL FOR ON-SITE EROSION HAS PASSED.
4. THE BOUNDARIES OF THE CLEARING LIMITS SHOWN ON THIS PLAN (INCLUDING INDIVIDUAL TREES TO BE SAVED) SHALL BE CLEARLY FLAGGED IN THE FIELD PRIOR TO CONSTRUCTION. DURING THE CONSTRUCTION PERIOD, NO DISTURBANCE BEYOND THE FLAGGED CLEARING LIMITS SHALL BE PERMITTED. THE FLAGGING SHALL BE MAINTAINED BY THE APPLICANT/CONTRACTOR FOR THE DURATION OF CONSTRUCTION.
5. THE ESC FACILITIES SHOWN ON THIS PLAN MUST BE CONSTRUCTED AS OUTLINED ON THE TYPICAL CONSTRUCTION SEQUENCE AND IN SUCH A MANNER AS TO INSURE THAT SEDIMENT LADEN WATER DOES NOT ENTER THE DRAINAGE SYSTEM OR VIOLATE APPLICABLE WATER STANDARDS.
6. THE ESC FACILITIES SHOWN ON THIS PLAN ARE THE MINIMUM REQUIREMENTS FOR ANTICIPATED SITE CONDITIONS. DURING THE CONSTRUCTION PERIOD, THESE ESC FACILITIES SHALL BE UPGRADED (E.G. ADDITIONAL SUMPS, RELOCATION OF DITCHES AND SILT FENCES, ETC.) AS NEEDED FOR UNEXPECTED STORM EVENTS.
7. CONSTRUCTION ACCESS TO THE SITE SHALL BE ONLY AS SHOWN ON THE APPROVED PLANS. ALL VEHICLES LEAVING THE SITE, ONTO PUBLIC RIGHTS OF WAY, SHALL BE CLEANED TO PREVENT "TRACKING" OF MUD, DIRT OR OTHER DEBRIS.
8. THE CONTRACTOR SHALL CLEAN ACCESS STREETS AND RIGHT-OF-WAY USING ONLY VACUUM SWEEPERS AT LEAST DAILY OR MORE FREQUENTLY AS MAY BE NECESSARY AND SO DIRECTED BY THE CITY.
9. CLEAN OR REMOVE AND REPLACE INLET PROTECTION DEVICES WHEN SEDIMENT HAS FILLED ONE-THIRD OF THE AVAILABLE STORAGE. ALL CATCH BASINS AND CONVEYANCE LINES SHALL BE CLEANED PRIOR TO PAVING. THE CLEANING OPERATION SHALL NOT FLUSH SEDIMENT LADEN WATER INTO THE DOWNSTREAM SYSTEM.
10. STOCKPILES ARE TO BE LOCATED IN SAFE AREAS AND ADEQUATELY PROTECTED BY TEMPORARY SECURED PLASTIC COVER, SEEDING OR MULCHING. HYDROSEEDING IS PREFERRED.
11. WHERE STRAW MULCH FOR TEMPORARY EROSION CONTROL IS REQUIRED, IT SHALL BE APPLIED AT A MINIMUM THICKNESS OF TWO INCHES.
12. ANY AREA STRIPPED OF VEGETATION, INCLUDING ROADWAY EMBANKMENTS, WHERE NO FURTHER WORK IS ANTICIPATED FOR A PERIOD OF 2 DAYS DURING THE WET SEASON OR 7 DAYS DURING THE DRY, SHALL BE IMMEDIATELY STABILIZED WITH THE APPROVED ESC METHODS (E.G. SEEDING, MULCHING, NETTING, EROSION BLANKETS, ETC.).
13. VEGETATION SHALL BE ESTABLISHED ON AREAS DISTURBED OR ON AREAS OF CONSTRUCTION AS NECESSARY TO MINIMIZE EROSION. AREAS TO BE ROUGH GRADED WITH FINISHED GRADING TO FOLLOW NEAR PROJECT COMPLETION ARE TO BE SEEDDED WITH ANNUAL, PERENNIAL OR HYBRID RYE GRASS. THIS ALSO INCLUDES PERIMETER DIKES AND THE SEDIMENT BASIN EMBANKMENT. HYDROSEEDING IS PREFERRED.
14. IMMEDIATELY FOLLOWING FINISH GRADING, PERMANENT VEGETATION WILL BE APPLIED AS APPROVED PER THE APPROVED PLANS, CURRENT WSDOT STANDARDS AND SPECIFICATIONS AND THE CITY OF LYNNWOOD REQUIREMENTS

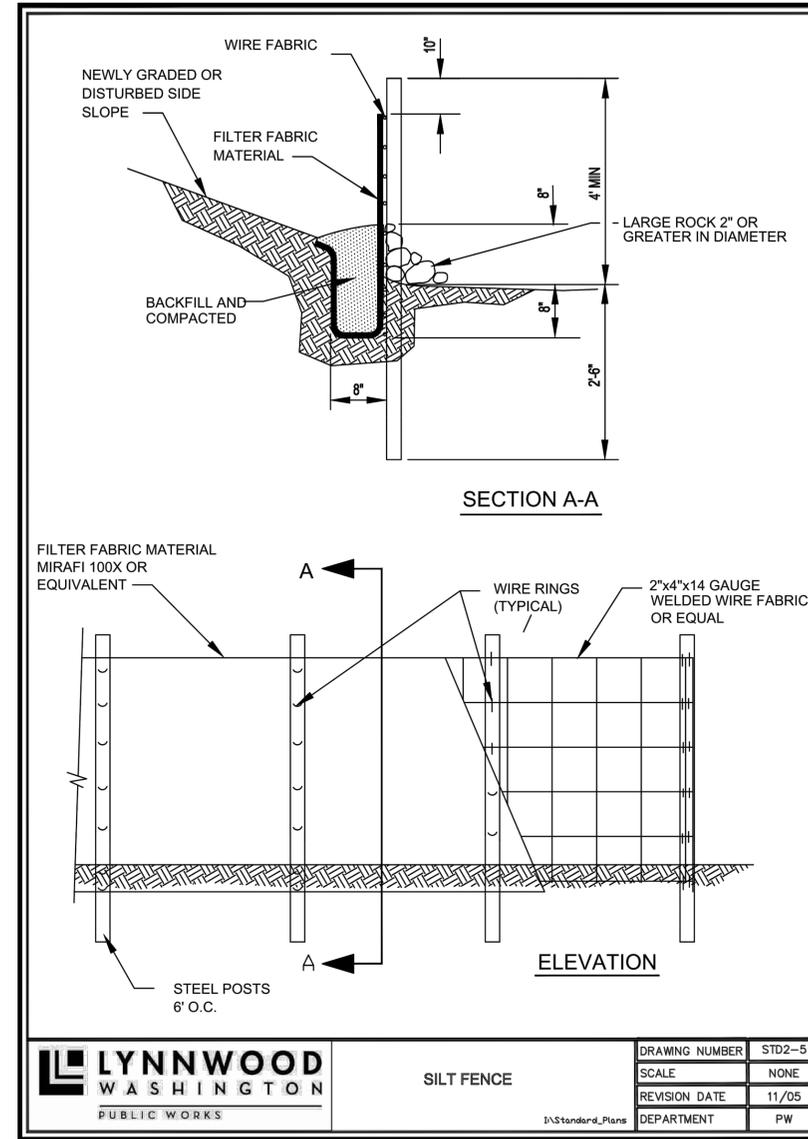

SILT FENCE

1
C3

Call 2 Working Days Before You Dig
1-800-424-5555
 Utilities Underground Location Center
 (ID, MT, ND, OR, WA)

22"x34" 9/9/2016 U:\C3D\2016\2016020\ENGINEERING\O_PLAN_SHEETS\FOUNDATION_SLAB\C3_TESC_DETAILS.DWG



NO	REVISION	DATE



BUSH, ROED & HITCHINGS, INC.
 LAND SURVEYORS & CIVIL ENGINEERS

2009 MINOR AVE. EAST SEATTLE, Washington 98102-3513
 (206) 323-4144 1-800-935-0508 FAX# (206) 323-7135

TESC DETAILS AND NOTES
MEADOWDALE NEIGHBORHOOD PARK - FOUNDATION SLAB
 CITY OF LYNNWOOD
 LYNNWOOD SNOHOMISH WASHINGTON

drawn by	HRB	checked by	TFD
scale	AS SHOWN	date	9/9/16
job no.	2016020		
sheet	C3	of	4

22"x34" 9/9/2016 U:\CSD\2016\2016020\ENGINEERING\0-PLAN SHEETS\FOUNDATION SLAB\C4 GRADING PLAN.DWG

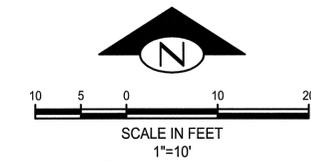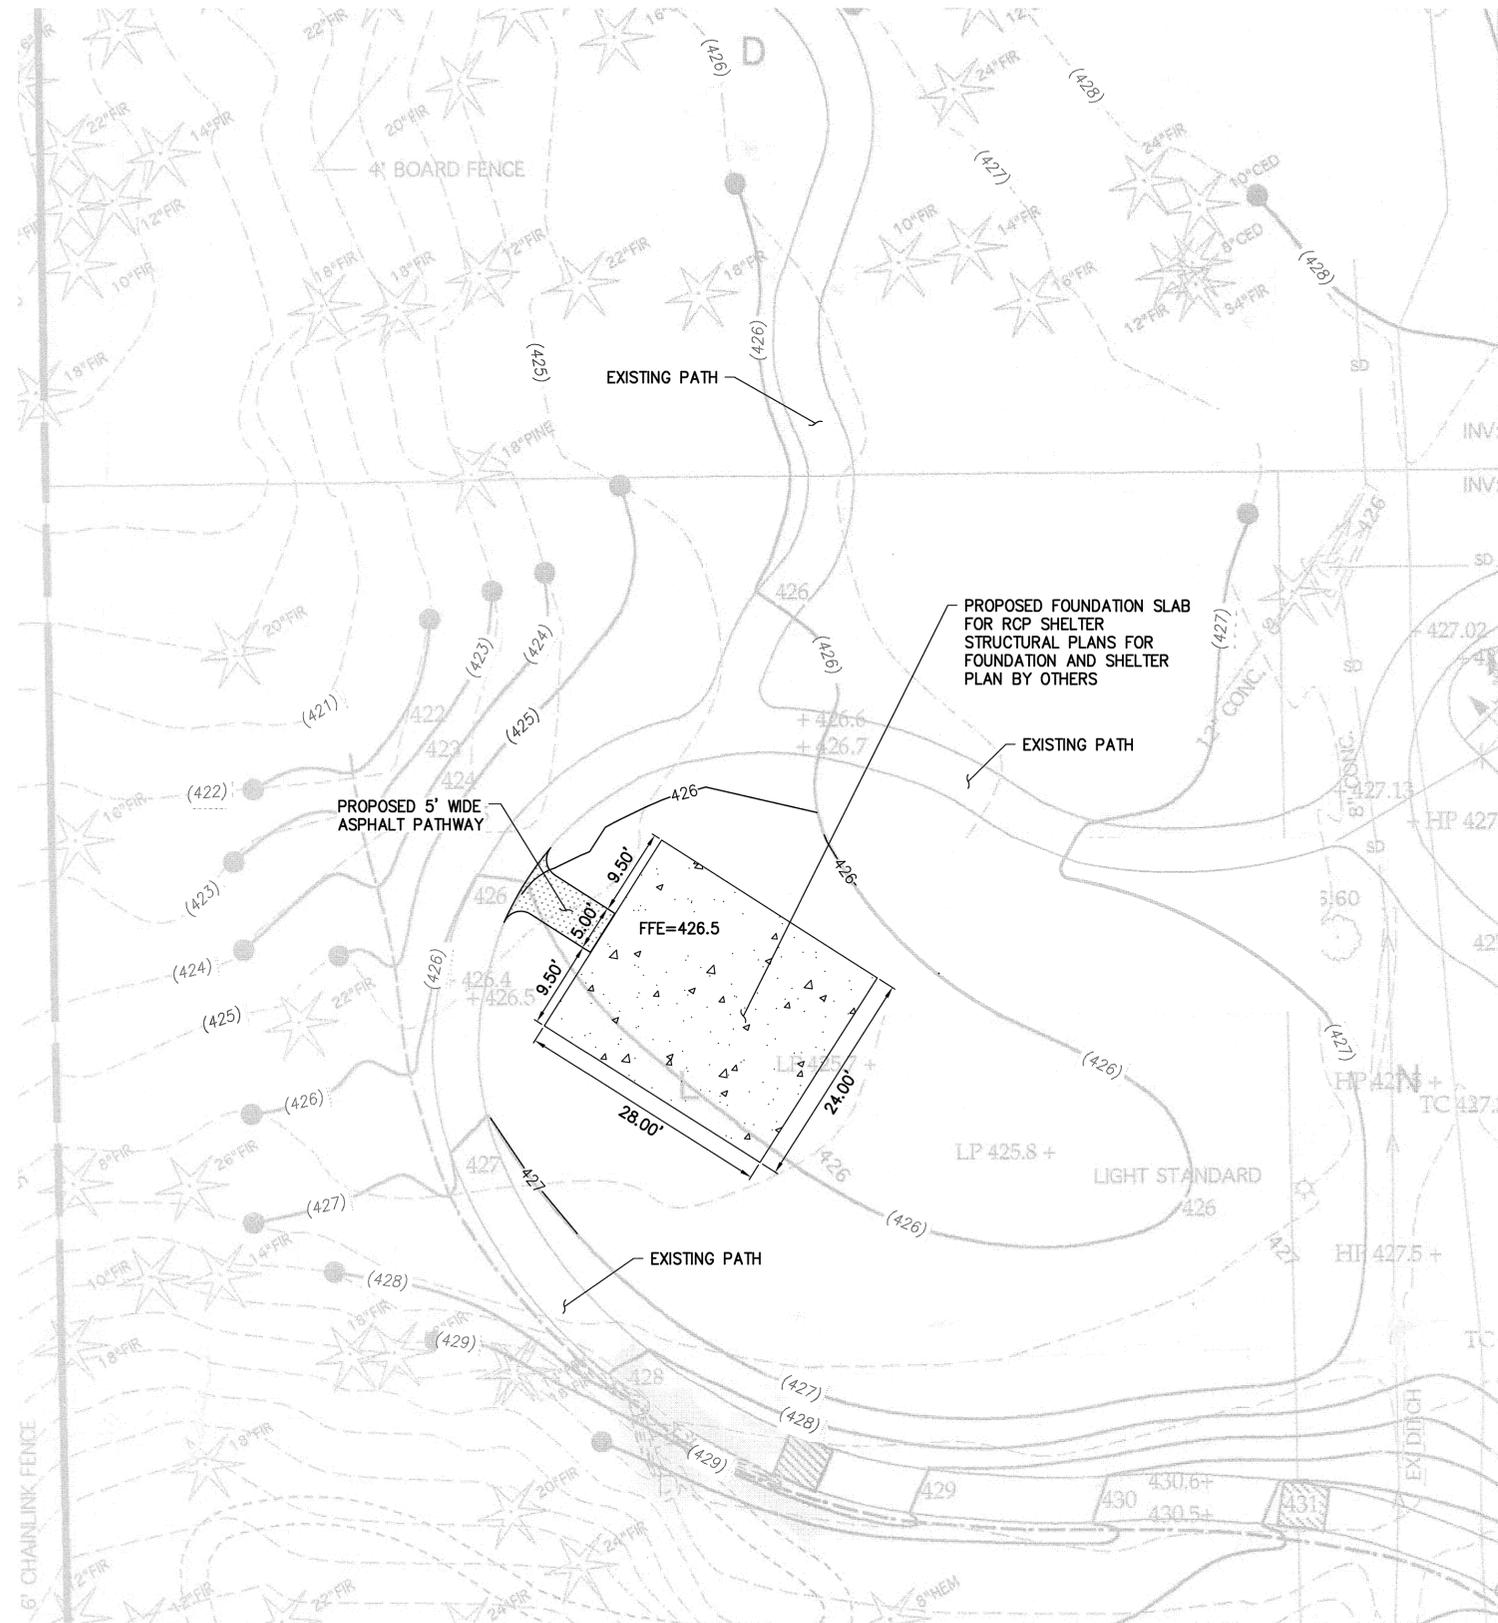


 Call 2 Working Days Before You Dig
1-800-424-5555
 Utilities Underground Location Center
 (ID, MT, ND, OR, WA)



NO	REVISION	DATE


BUSH, ROED & HITCHINGS, INC.
 LAND SURVEYORS & CIVIL ENGINEERS
 2009 MINOR AVE. EAST (206) 323-4144
 SEATTLE, Washington 1-800-935-0508
 98102-3513 FAX# (206) 323-7135

GRADING PLAN
MEADOWDALE NEIGHBORHOOD PARK - FOUNDATION SLAB
 CITY OF LYNNWOOD
 LYNNWOOD SNOHOMISH WASHINGTON

drawn by	checked by
HRB	TFD
scale	date
AS SHOWN	9/9/16
job no.	2016020
sheet	C4 of 4