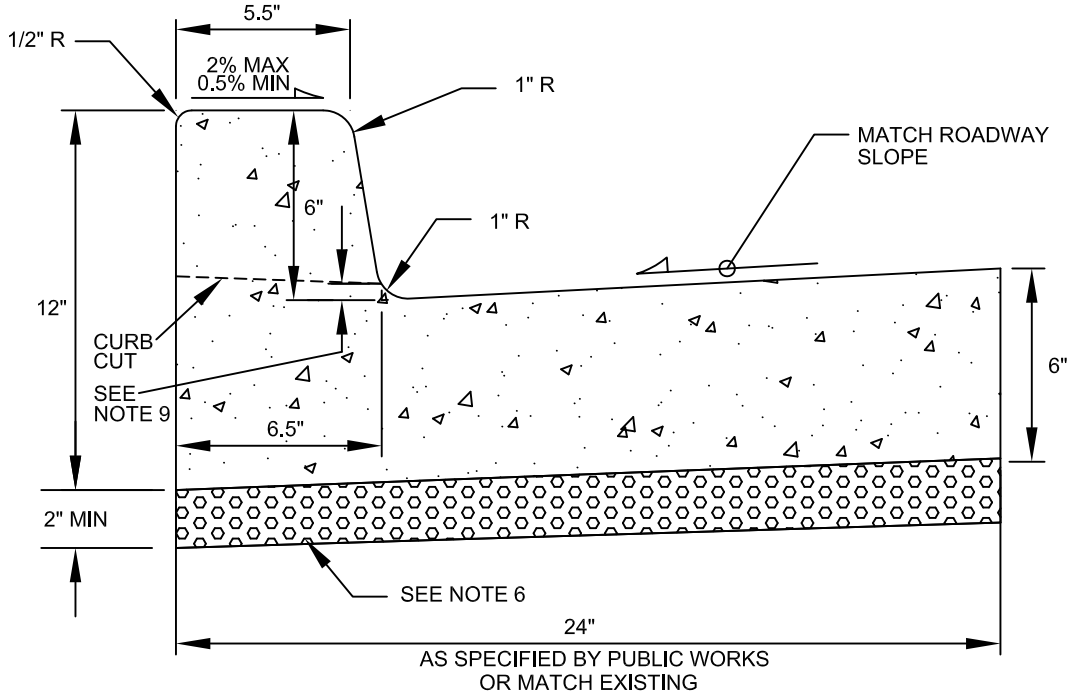

TYPICAL SECTION

NOTES

1. FINISHING, CURING, FORM WORK, PLACEMENT AND MATERIALS SHALL CONFORM TO WSDOT SPECS.
2. EXPANSION JOINTS SHALL BE PLACED ON 10 FOOT CENTERS.
3. EXPANSION JOINTS SHALL BE PLACED ADJACENT TO CATCH BASINS, INLETS AND AT POINTS OF TANGENCY ON STREETS, ALLEYS, AND DRIVEWAY RETURNS.
4. ALL JOINTS SHALL BE CLEAN AND EDGED.
5. FINISH SHALL BE LIGHT BROOM FINISH.
6. ALL CURB AND GUTTER SHALL BE PLACED ON A MIN. OF 2" OF CRUSHED SURFACING TOP COURSE COMPACTED AS SPECIFIED IN WSDOT STANDARDS AND SPECS.
7. FULL EXPANSION JOINT BETWEEN CURB AND GUTTER AND THE SIDEWALK.
8. SEE 4-10 OPEN CURB FACE FRAME & GRATE INSTALLATION FOR 4' OF THICKENED CURB AT CATCH BASIN.
9. 1/4" MAX LIP IN DRIVEWAY CUTS
   NO LIP (FLUSH) IN CURB RAMP CUTS.

LYNNWOOD
WASHINGTON
PUBLIC WORKS

CONCRETE CURB AND GUTTER

I:\Standard_Plans

DRAWING NUMBER	STD3-6
SCALE	NONE
REVISION DATE	04/14
DEPARTMENT	PW