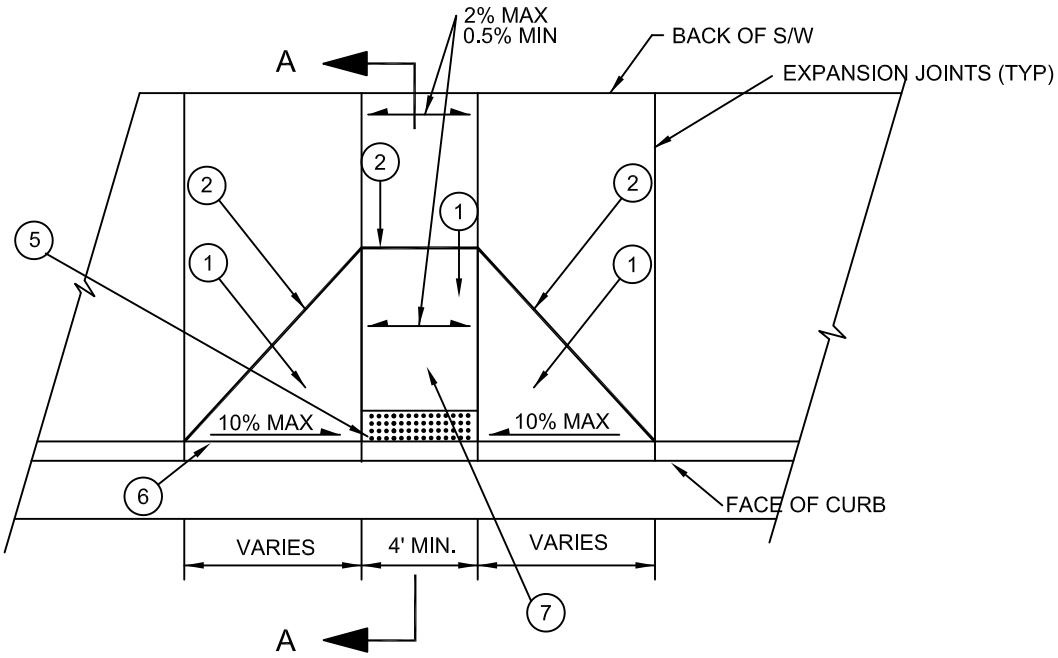

PLAN

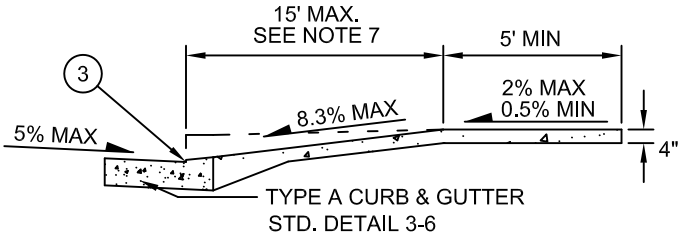

SECTION A-A

NOTES

1. RAMP TEXTURING SHALL BE A BROOM FINISH PERPENDICULAR TO THE DIRECTION OF TRAVEL
2. 1/2" DEPTH EXPANSION JOINT.
3. NO LIP AT GUTTER LINE
4. CURB RAMPS WILL NOT BE POURED INTEGRAL WITH SIDEWALK AND SHALL BE ISOLATED BY EXPANSION JOINT MATERIAL ON ALL SIDES.
5. TRUNCATED DOME PER ADA STANDARDS. TRUNCATED DOMES SHALL BE NON-CONCRETE, POLYMER, COMPOSITE, CAST IN PLACE UNITS COMPLIANT WITH ADA STANDARDS. COLOR SHALL BE UNIFORMLY INTEGRAL THROUGHOUT THE CROSS SECTION AND CONTRASTING COLOR WITH ADJACENT WALKWAY SURFACES PER ADA STANDARDS. SUBMIT SAMPLE TO CITY FOR APPROVAL PRIOR TO INSTALLATION.
6. POUR CURB SEPARATE FROM SIDEWALK POUR WITH FULL DEPTH EXPANSION AT BACK OF CURB.
7. RAMP LENGTH VARIES (WITH A MINIMUM OF 6') AND SHALL BE CALCULATED BASED ON A RAMP SLOPE WHICH DOES NOT EXCEED 8.3%.

LYNNWOOD WASHINGTON
PUBLIC WORKS

TYPE A CURB RAMP

I:\Standard_Plans

DRAWING NUMBER	STD3-13
SCALE	NONE
REVISION DATE	03/14
DEPARTMENT	PW