



**SIGN INSTALLATION  
IN FILL SECTION**

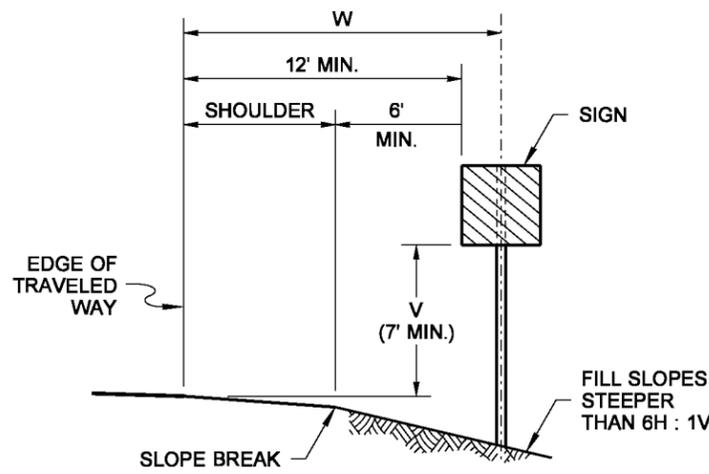


**SIGN INSTALLATION  
ON STEEP FILL SLOPES**

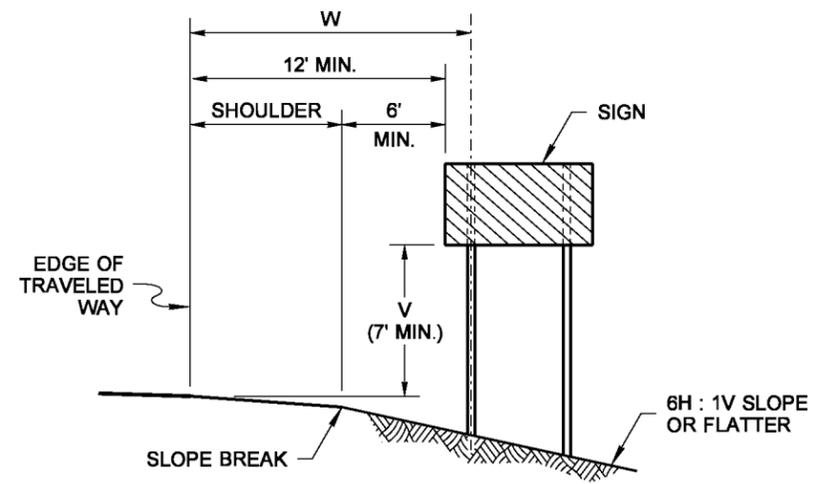


**MULTIPLE SIGN POST INSTALLATION  
IN FILL SECTION**


DRAWN BY: FERN LIDDELL

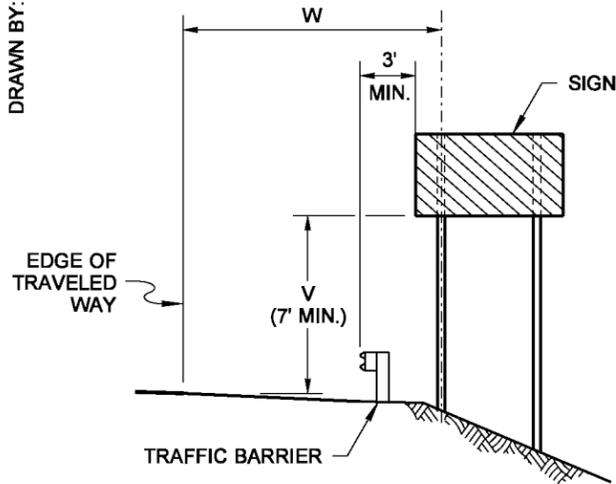

**SIGN INSTALLATION  
BEHIND TRAFFIC BARRIER**

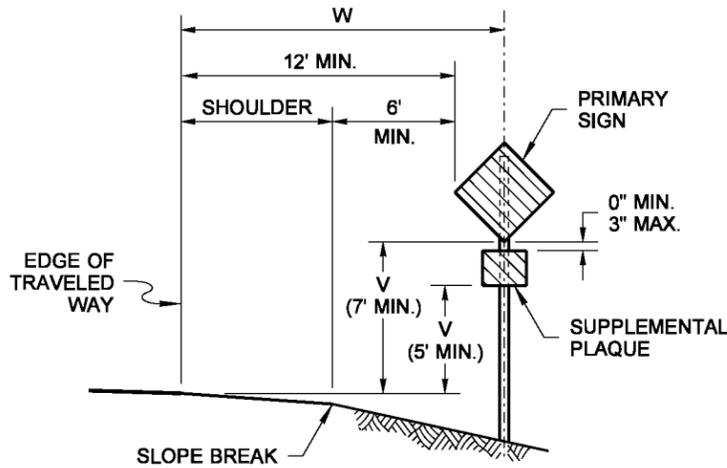


**SIGN WITH SUPPLEMENTAL  
PLAQUE INSTALLATION  
IN FILL SECTION**

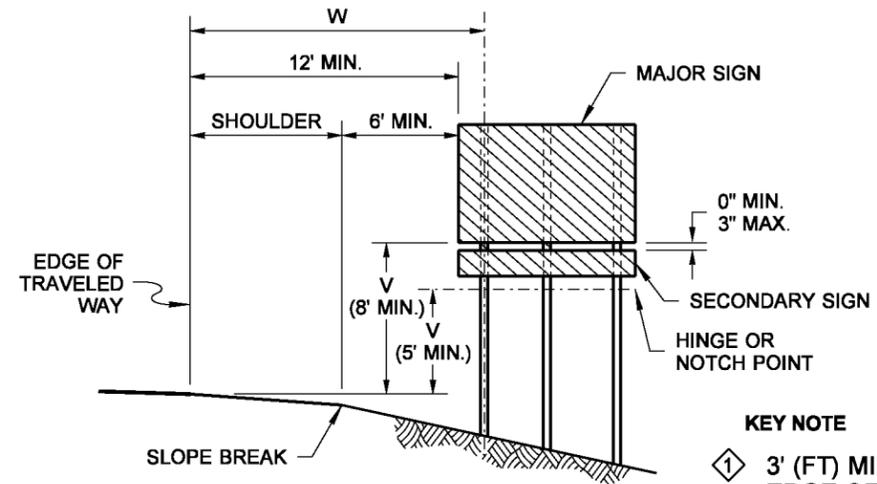


**GUIDE OR DIRECTIONAL SIGN WITH  
SECONDARY SIGN INSTALLATION ON  
EXPRESSWAYS AND FREEWAYS**


**KEY NOTE**  
 1 3' (FT) MIN. FROM ANY POINT ALONG BOTTOM  
 EDGE OF SIGN PANEL TO THE GROUND

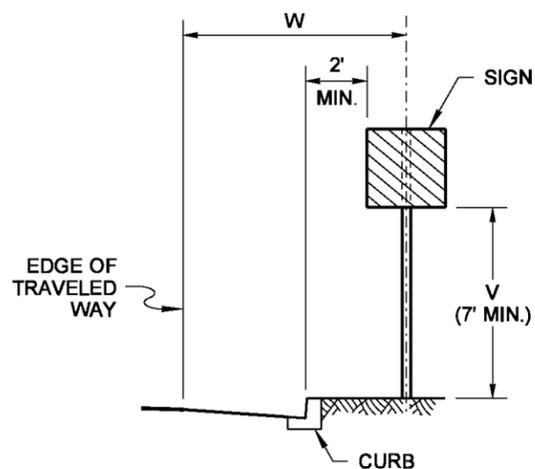

**SIGN INSTALLATION  
IN CURB SECTION**

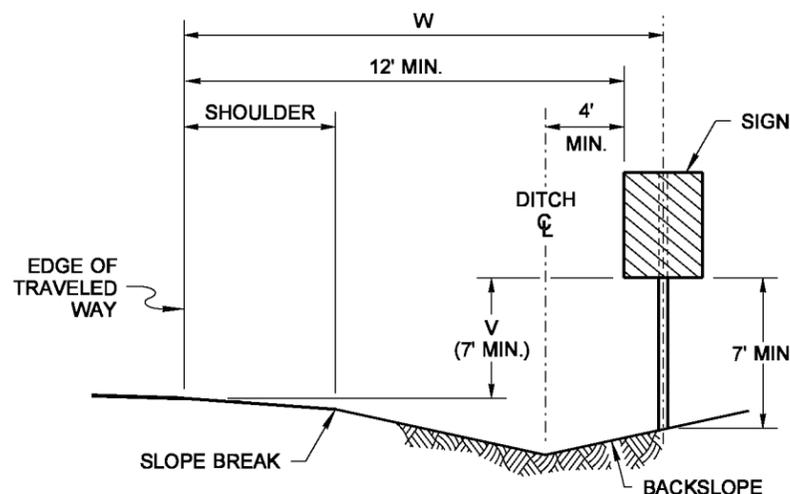

**SIGN INSTALLATION  
IN DITCH SECTION**

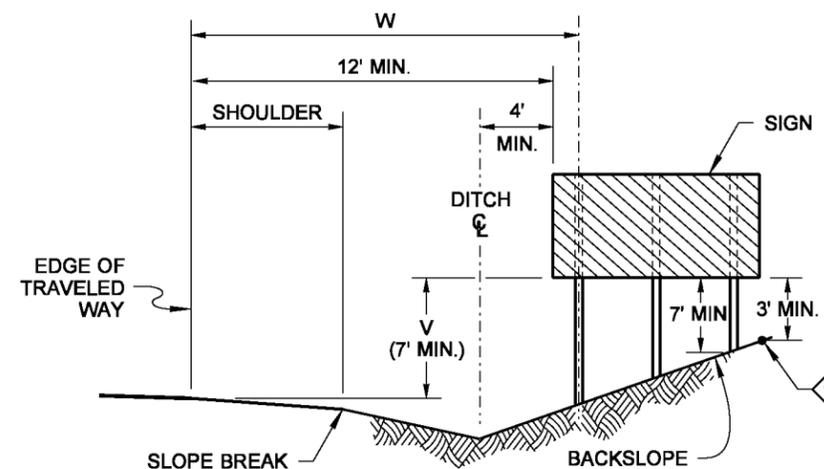

**MULTIPLE SIGN POST INSTALLATION  
IN DITCH SECTION**

**NOTES**

1. Refer to the Sign Specification Sheet of the Contract for the 'V' and 'W' distances.
2. The minimum vertical distance from the bottom of the sign to the ground shall not be less than 7' (ft) for signs located within the Design Clear Zone.



**GROUND-MOUNTED  
SIGN PLACEMENT  
STANDARD PLAN G-20.10-02**

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER  
 Washington State Department of Transportation