


TOP VIEW



NOTES:

- ① MATERIAL USED SHALL BE CAST IRON PER ASTM-A48, CLASS 30. FRAME SHALL HAVE A BITUMINOUS COATING APPLIED.
- ② WHEN A LOCKING GRATE OR COVER IS REQUIRED THE FRAME SHALL BE FABRICATED SO AS TO ACCEPT TWO (2) 5/8" STAINLESS STEEL SOCKET HEAD CAP SCREWS OF GRATE OR COVER.
- ③ FOR APPROVED GRATES AND SOLID COVER SEE STD DWG'S 4-6 & 4-8

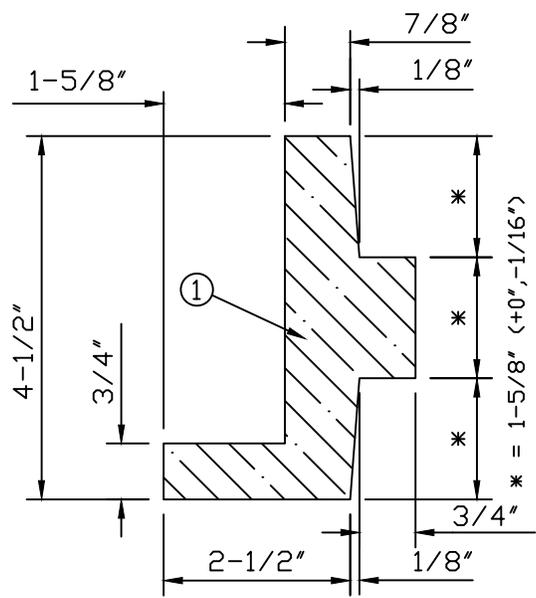

FRAME FOR GRATE OR SOLID COVER

DRAWING NUMBER	STD4-5
SCALE	NONE
REVISION DATE	08/03
DEPARTMENT	PW