


NOTES:

1. ORIENTATION LOCATIONS (FROM EDGE OF WALKWAY OR FACE OF CURB):
 - HANDHOLE ACCESS DOOR SHALL BE MOUNTED AT 90°
 - RECEPTACLE SHALL BE MOUNTED AT 90°, SEE STD. CC-ILL-9.
 - CARFLEX CONDUIT SHALL BE MOUNTED AT 0°
 - BANNER ARMS SHALL BE MOUNTED AT 180°, NON-BREAKAWAY COUPLING ATTACHMENT BY VALMONT
 - FLOWER BASKET SUPPORT ARMS SHALL BE MOUNTED AT 90° AND 270° ON PEDESTRIAN LUMINAIRE POLE, FIXED COUPLING ATTACHMENT BY VALMONT
2. NEW AND EXISTING UTILITIES MUST BE SHOWN ON DEVELOPMENT PLANS WITH APPROPRIATE CLEARANCES. ANY FIELD ADJUSTMENTS MUST BE APPROVED BY RESPECTIVE UTILITY OWNERS.
3. FOR ADDITIONAL INSTALLATION DETAILS REFER TO LYNNWOOD STANDARD PLANS TR-ILL-1 AND TR-ILL-2.
4. LUMINAIRE MANUFACTURER: ARCHITECTURAL LIGHTING - SPECTRA (LARGE), OR APPROVED EQUAL.
5. POLE: 5" DIA STRAIGHT ALUMINUM, POST TOP MOUNT, METALLIC POLYESTER POWDER COAT, GRAPHITE GRAY (COLOR CODE RAL 7024).
6. BASE: 2'-8" TALL X 5" DIA, CLEAR ANODIZED ALUMINUM.
7. BANNER AND FLOWER BASKET ARMS AND ATTACHMENTS PER MANUFACTURER.
8. LUMINAIRE: ALUMINUM HOUSING WITH QUICK INSTALLATION SYSTEM (QIS), CLEAR CYLINDER LUMINAIRE HOUSING WITH ROUND COPPER ANGLE HOOD. LED 4000K LAMP (NEUTRAL WHITE)
9. ELECTRIC SERVICE, METER, AND CONDUCTORS PER APPROVED PLANS.

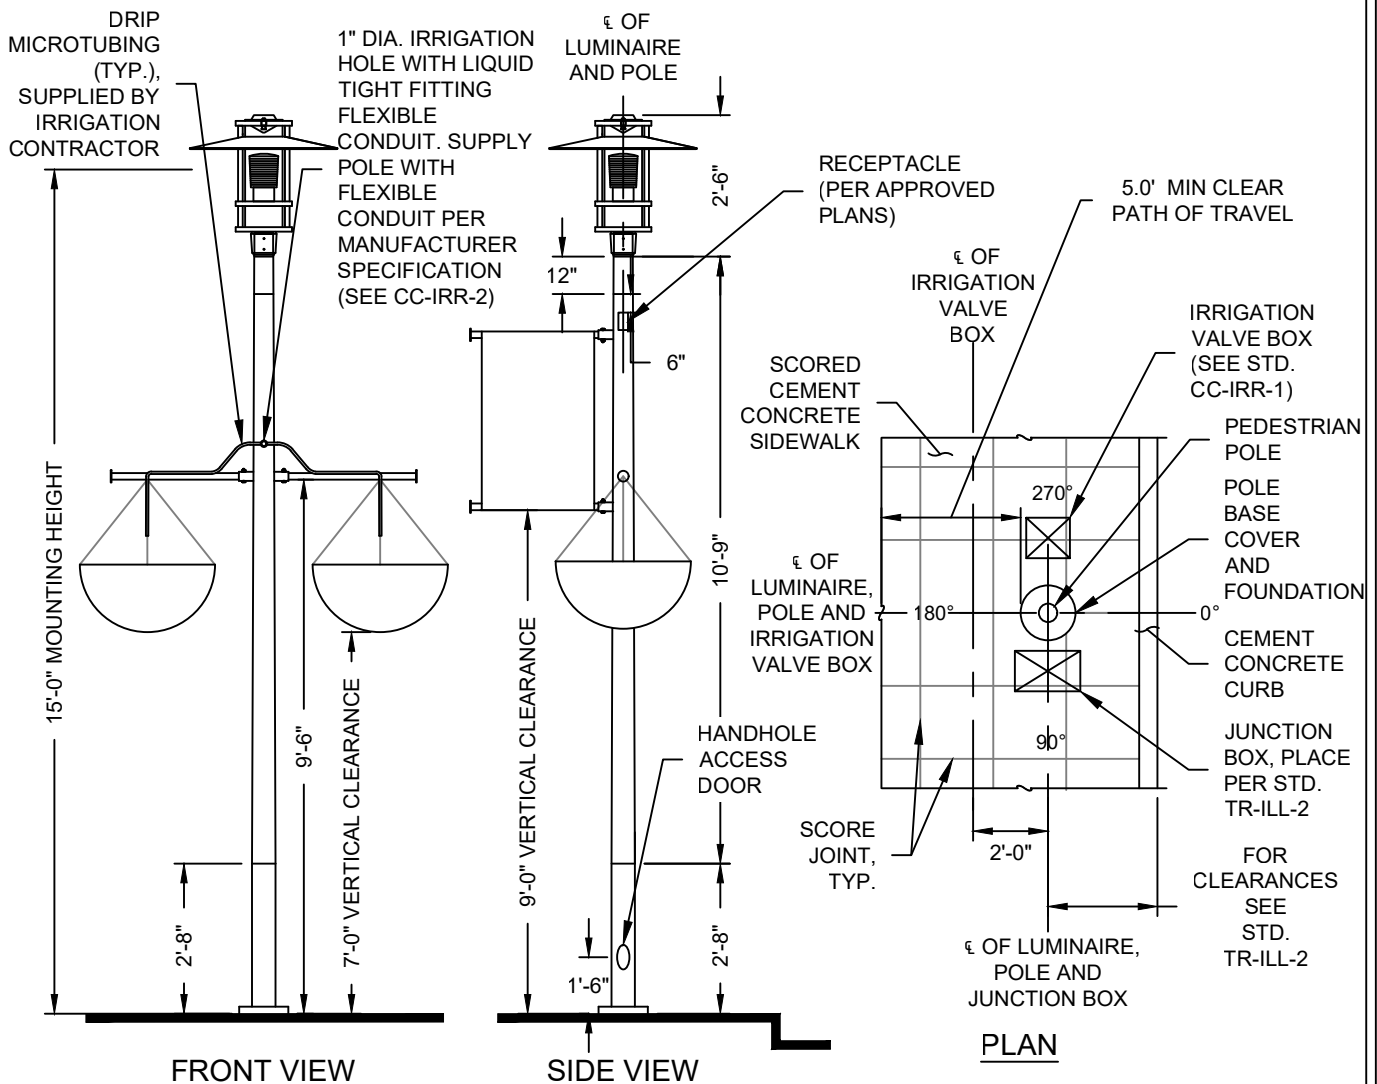

STREETSCAPE TYPE 3 CORE: 40TH AVE W AND 42ND BETWEEN 196TH ST SW TO ALDERWOOD MALL BLVD AND 198TH ST SW BETWEEN 44TH AVE W AND 40TH AVE W

DRAWING NUMBER	CC-ILL-7
SCALE	NONE
REVISION DATE	03/22
DEPARTMENT	PW