

NOTES:

1. ORIENTATION LOCATIONS (FROM EDGE OF WALKWAY OR FACE OF CURB):
- HANDHOLE ACCESS DOOR SHALL BE MOUNTED AT 90°
- RECEPTACLE SHALL BE MOUNTED AT 90°, SEE STD. CC-ILL-9
- CARFLEX CONDUIT SHALL BE MOUNTED AT 0°
2. NEW AND EXISTING UTILITIES MUST BE SHOWN ON DEVELOPMENT PLANS WITH APPROPRIATE CLEARANCES. ANY FIELD ADJUSTMENTS MUST BE APPROVED BY RESPECTIVE UTILITY OWNERS.

3. FOR ADDITIONAL INSTALLATION DETAILS REFER TO LYNNWOOD STANDARD PLANS TR-ILL-1 AND TR-ILL-2.
4. ELECTRIC SERVICE, METER, AND CONDUCTORS PER APPROVED PLANS.

LUMINAIRE:


1. ALUMINUM HOUSING WITH QUICK INSTALLATION SYSTEM (QIS)
2. LED 4000K LAMP (NEUTRAL WHITE)
3. FLAT LENS

STREET LIGHTING:

1. LUMINAIRE MANUFACTURER: KIM LIGHTING WARP9 - LED, LARGE, OR APPROVED EQUAL.
2. POLE: 8.5" DIA., 0.014"/FT TAPERED ALUMINUM, METALLIC POLYESTER POWDER COAT, GRAPHITE GRAY (COLOR CODE RAL 7024).
3. BASE COVER: CYCLONE - BD56 METALLIC POLYESTER POWDER COAT, GRAPHITE GRAY (COLOR CODE RAL 7024).
4. ARM: 4'-0" LENGTH, FINISH CLEAR ANODIZED ALUMINUM.
5. BANNER ARMS AND ATTACHMENTS PER MANUFACTURER.

PEDESTRIAN LIGHTING:

1. LUMINAIRE MANUFACTURER: KIM LIGHTING WARP9 - LED, SMALL, OR APPROVED EQUAL.
2. POLE: 5.5" DIA., 0.014"/FT TAPERED ALUMINUM, METALLIC POLYESTER POWDER COAT, GRAPHITE GRAY (COLOR CODE RAL 7024).
3. BASE COVER: CYCLONE - BD55 METALLIC POLYESTER POWDER COAT, GRAPHITE GRAY (COLOR CODE RAL 7024).
4. ARM: 1'-6" LENGTH, FINISH CLEAR ANODIZED ALUMINUM.
5. BANNER ARM SHALL BE MOUNTED AT 180°, NON-BREAKAWAY COUPLING ATTACHMENT BY VALMONT

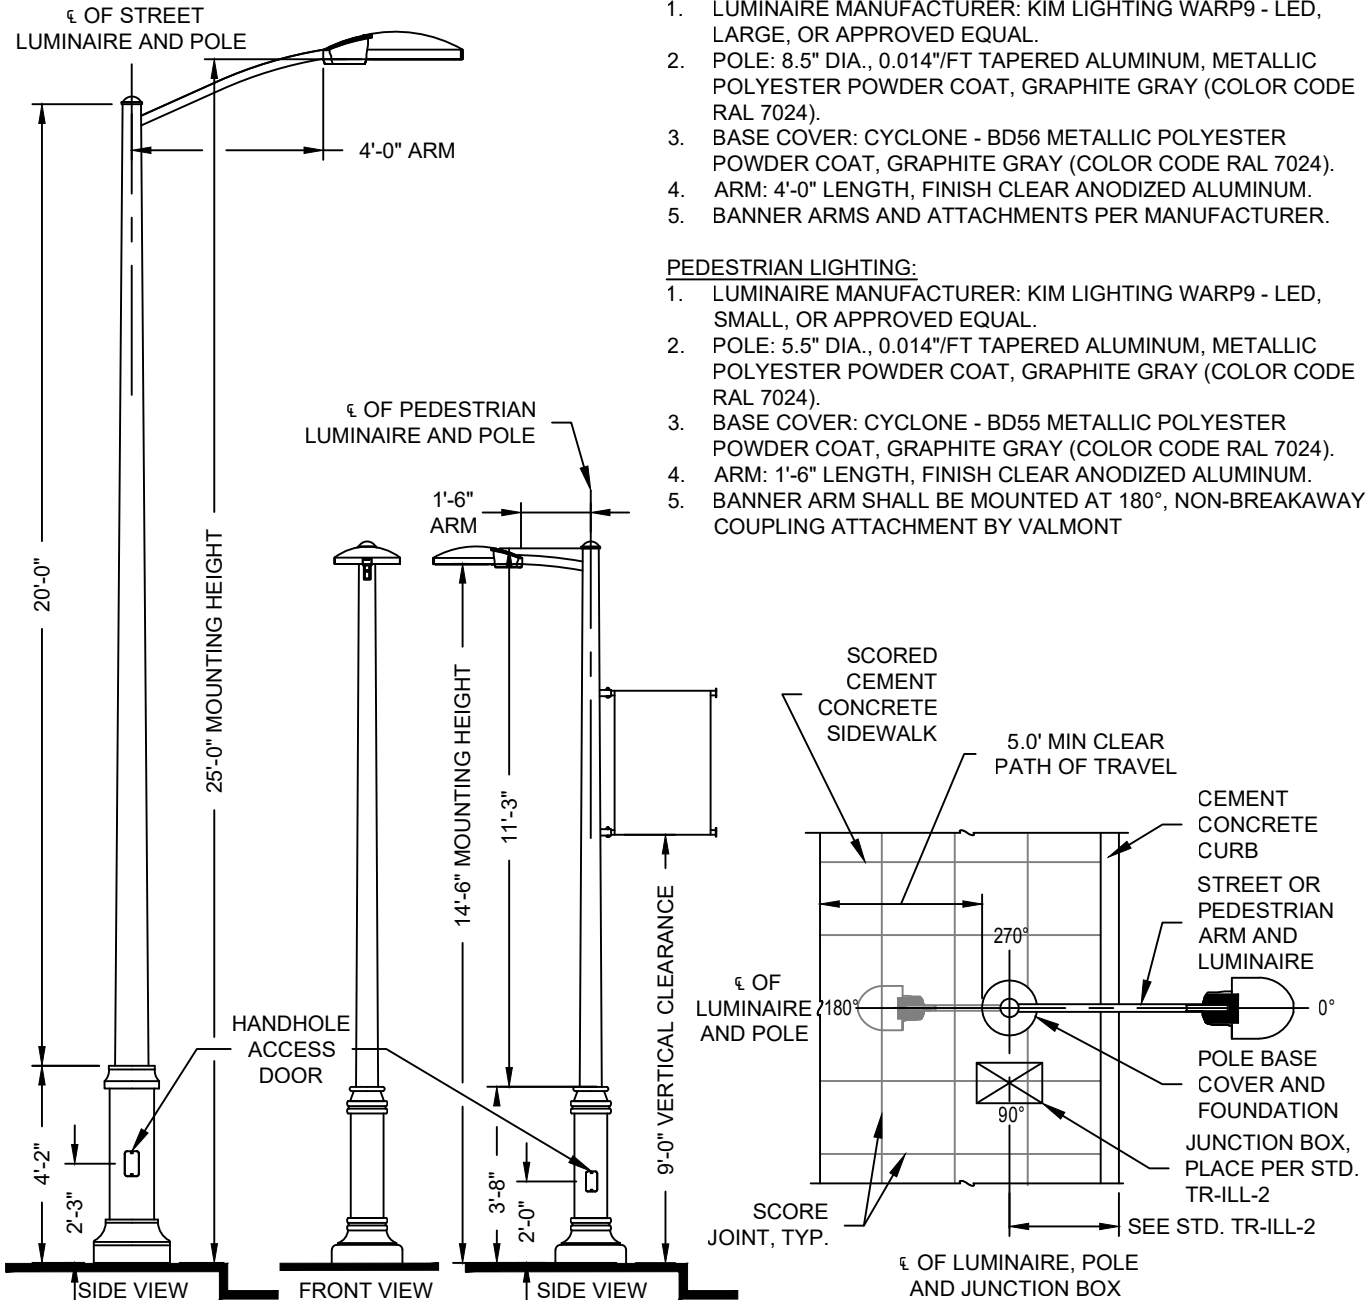

STREETSCAPE TYPE 3 EXTENSION:

40TH & 42ND AVE W BETWEEN 194TH ST SW TO 196TH ST SW



CITY CENTER
STREETSCAPE TYPE 3 (EXTENSION):
STREET & PEDESTRIAN LUMINAIRE &
POLE

CC-ILL-8-City-Center-Streetscapes-Type-3-(Extension)-Street-&-Pedestrian-Luminaire-&-Pole.dwg

DRAWING NUMBER	CC-ILL-8
SCALE	NONE
REVISION DATE	03/22
DEPARTMENT	PW