


EXTRUDED CEMENT CONCRETE CURB

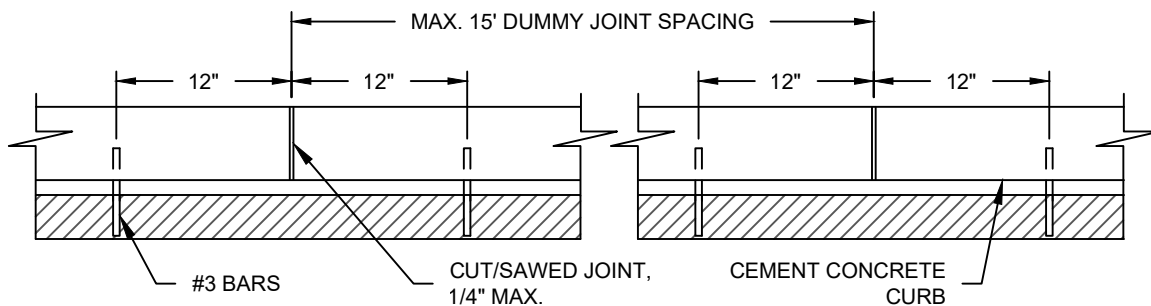

SPACING OF ANCHOR BARS

NOTES:

1. CUT JOINTS SHALL BE PLACED ONLY AT POINTS OF TANGENCY ON STREET ALLEY AND DRIVEWAY RETURNS AND WHERE EXPANSION JOINTS OCCUR IN THE PAVEMENT SLAB.
2. FINISHING, CURING, FORM WORK, PLACEMENT AND MATERIALS SHALL CONFORM TO THE CURRENT WSDOT SPECS.
3. AT THE CONTRACTOR'S OPTION CONCRETE CURBS MAY BE ANCHORED TO THE EXISTING PAVEMENT EITHER BY PLACING STEEL TIE BARS 1 FOOT ON EACH SIDE OF EVERY JOINT, OR BY USING AN ADHESIVE. THE ADHESIVE SHALL MEET THE REQUIREMENTS OF SECTION 9-26 OF THE WSDOT/APWA STANDARD SPECIFICATIONS FOR TYPE II EPOXY RESIN.