


COLLECTOR ARTERIAL

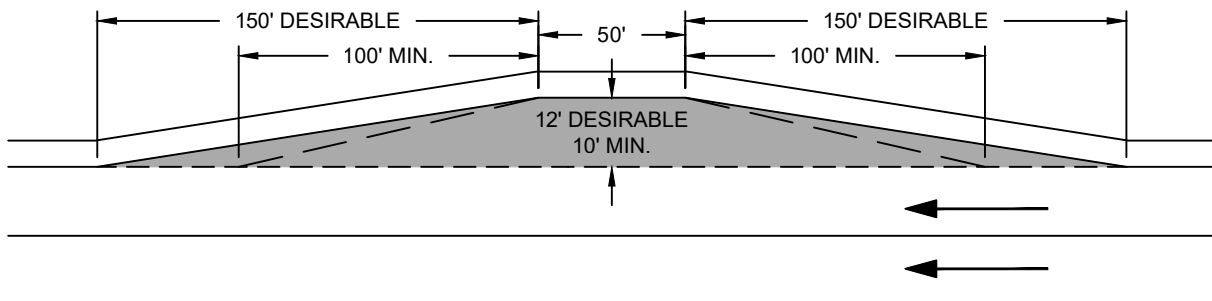

MINOR, MAJOR, OR PRINCIPAL ARTERIAL

NOTES:

1. LOCATION AND REQUIREMENT FOR BUS STOPS WILL BE AT THE DIRECTION OF THE PUBLIC WORKS DIRECTOR.
2. TURNOUT SHALL BE 6" MIN. CONCRETE DEPTH WITH BASE OF 6" CSBC. PROVIDE #4 REBAR AT 12" OC, EW CENTERED IN SLAB.
3. TURNOUT AND BOARDING AREAS SHALL NOT EXCEED 2.0% GRADE IN ANY DIRECTION EXCEPT TO MATCH GRADE OF EXISTING ROADWAY.
4. PER PROWAG SECTION R308.1.3.2, BOARDING AND LIGHTING AREAS AND BOARDING PLATFORMS SHALL BE CONNECTED TO STREETS, SIDEWALKS, OR PEDESTRIAN CIRCULATION PATHS BY PEDESTRIAN ACCESS ROUTES COMPLYING WITH R302. SEE PROWAG SECTION 308 FOR ALL REQUIREMENTS FOR TRANSIT STOPS.