

LW-G2428-04
 MEADOWDALE NEIGHBORHOOD PARK
 LYNNWOOD, WA

RCP SHELTERS, INC.
 2100 SE RAYS WAY, STUART, FL 34994
 PO BOX 25, STUART, FL 34995 - 0025
 ■ SHELTERS ■ PAVILIONS ■ CONCESSIONS ■ KIOSKS ■ FABRIC SHADE
 ■ RESTROOMS ■ BANDSHELLS ■ MINI-SHELTERS ■ DUGOUTS ■ FABRIC SAIL
 Phone 800 - 525 - 0207 Fax 772 - 288 - 0207
 www.rcpselters.com E-mail - info@rcpselters.com




PROJ. NO.:	16-137	
DRAWN:	RAR	6-7-16
CHKD:		
REV 1:	TJE	6-7-16
REV 2:		
REV 3:		
REV 4:		
SHOP DWG NO.:		
EEO JOB NO.:		11631
SHEET NO.:		

METAL ROOFING NOTES:

CLEAR PROTECTIVE FILM MUST BE REMOVED FROM ALL METAL PRIOR TO INSTALLATION.

METAL ROOFING SHOULD BE STORED INDOORS OR WHEN STORED OUTSIDE IT SHOULD BE STORED UP ON BLOCKS WITH FINISHED FACE UP AND SLOPED TO DRAIN.

DURING INSTALLATION, ALL METAL SHAVINGS MUST BE REMOVED IMMEDIATELY TO AVOID RUSTING OF PANELS.

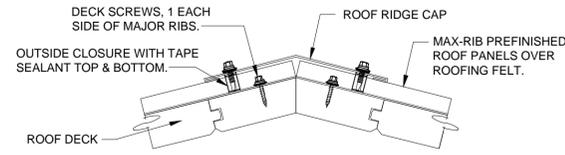

DECK DETAIL @ RIDGE




9" RIDGE CAP
 26 GA.


32 LN. FT. REQUIRED

INSTALLATION:
 FASTEN RIDGE CAP TO EACH ROOFING PANEL AT HIGH RIB. (1) LAP SCREW PER RIB, PER SIDE.

THE ACTUAL ROOF PITCH MAY VARY FROM THESE GENERAL DETAILS.

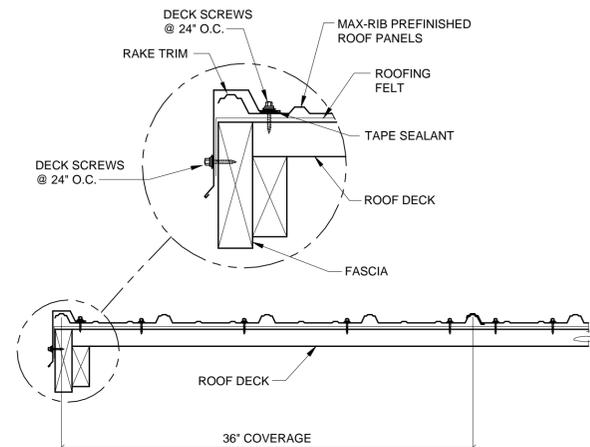


SECTION THRU ROOFING PANEL @ RAKE

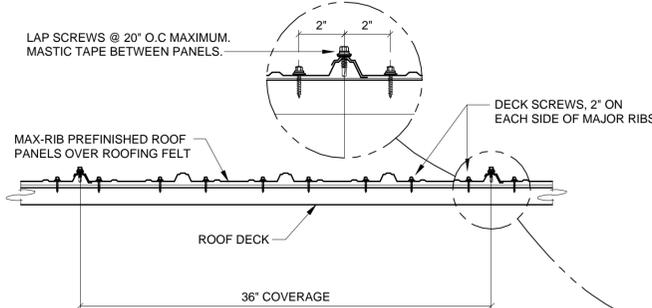


SECTION THRU ROOFING PANEL @ EAVE

(METAL DECK ATTACHMENT ALONG RIDGE IS SAME AS AT THIS SECTION)

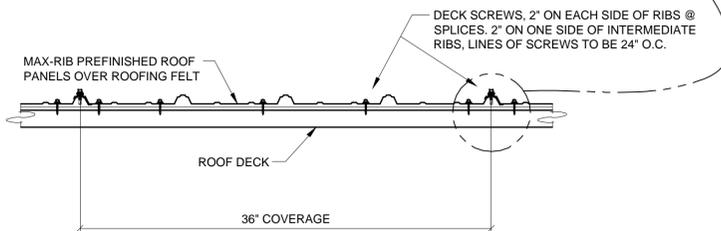

SECTION THRU ROOFING PANEL @ INTERIOR

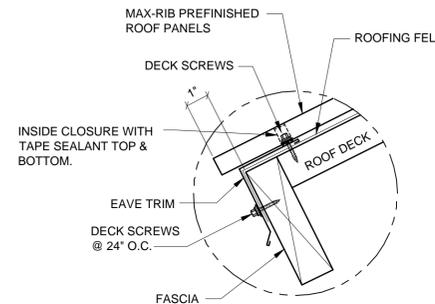

EAVE DETAIL

SELF-DRILLING SCREW SPECIFICATIONS:
 DECK SCREW = 9-15x1 WOODGRIP HWH SHARP POINT
 LAP SCREW = 1/4-14x7/8 IMPAX LAP, 5/16\"/>

